Includes Ordnance Survey Ireland data reproduced under OSi Licence number 2020/23/CCMA/SouthDublinCountyCouncil.
Unauthorised reproduction infringes Ordnance Survey Ireland and Government of Ireland copyright.
© Ordnance Survey Ireland, 2020.

Works to the buildings TBC with trader liaison; may include render or paint (colour TBC) and new signage / shopfront works

Reconfiguration of rear access footways to deter antisocial behavior and promote safety and visibility. Low dense edge planting at the rear walls to prevent hidden gathering spaces. Removal of third walkway along the rear wall.

Bancroft Park

New Library

The Penny Black

Greenhills Rd

Tymon Park

NBA

Tallaght

Proposed Signalised Crossing at the NBA / Tymon Park Entracnce

Proposed cycle ways
Typical Cross section below;

Proposed plaza space

TREES;
The existing trees shown Red are to be replaced.
A tree survey has been commissioned to assess the trees shown in Orange to asses how many of these can be retained.

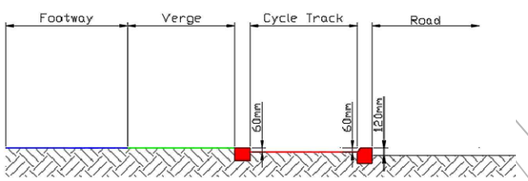

St. Joseph's Special School

All Junction Layouts to be updated as new NTA standards come available

TYMON NORTH GARDENS
CASTLETYMON COURT
CASTLETYMON GREEN
CASTLETYMON ROAD
CASTLE LAWNS
AONGUS COURT
SAINT AONGUS CRESCENT

Comhairle Contae Átha Cliath Theas South Dublin County Council	COMHAIRLE CONTAE ÁTHA CLIATH THEAS SOUTH DUBLIN COUNTY COUNCIL LAND USE, PLANNING & TRANSPORTATION, COUNTY HALL, TALLAGHT, DUBLIN 24 M. Mulhern DIRECTOR T. O'Grady SENIOR ENGINEER	REV. DATE DESCRIPTION	SCALE 1:1000 @ A3 DATE Nov 2021 DRAWN AB CHECKED CL	PROJECT TITLE CASTLETYMON ENHANCEMENT PROJECT DRAWING TITLE Proposed Part 8 DRAWING NO. SDCC-CEP-0010	REV. P8-01

LEGEND

Existing Planting

Existing Trees to be Retained

Existing Trees to be Removed

Existing Grass Areas

Proposed Planting

Proposed Street Tree Planting
Varieties to match the primary species along the existing Castletymon Road (Fraxinus spp.)

Proposed Plaza Tree Planting
to included one of the following varieties:
Betula pendula, and/or similar approved

Low Maintenance Ornamental Shrubs
to included the following varieties:
Euonymus fortunei, Hypericum perforatum, Rosmarinus officinalis, Pachysandra terminalis, Vinca minor, and/or similar approved

Low Maintenance Defensive Shrubs
to included the following varieties:
Berberis thunbergii, Taxus baccata, Mahonia aquifolium, and/or similar approved

Low Maintenance Grass Verge
Proposed and existing areas to be seeded/improved

Proposed Hardscape*

Proposed Concrete Footpath

Proposed Paving
Road/Transitional Paving
Interlocking heavy duty PC pavers, Colour: Mid-Grey, and/or similar approved

Commercial Plaza Paving
Large Pre-Cast Pavers, Colour: Grey, and/or similar approved

Commercial Paving Main
Pre-Cast Pavers, Colour: Silver, and/or similar approved

Commercial Paving Banding
Pre-Cast Pavers, Colour: Grey, and/or similar approved

Library Plaza Paving
Set Pavers, to match the existing sets in front of the library, , and/or similar approved

Proposed Planting Edge
Flush Planter Edge
50mm max edge

Raise Planter Edge
400mm max concrete edge

Raised Seating Edge
400mm max concrete edge

Cycle Parking
Sheffield stands, and/or similar approved
Standards size, +1 to be for low/cargo bicycles

Comhairle Contae Átha Cliath Theas
South Dublin County Council

COMHAIRLE CONTAE ÁTHA CLIATH THEAS
SOUTH DUBLIN COUNTY COUNCIL
LAND USE, PLANNING & TRANSPORTATION,
COUNTY HALL, TALLAGHT, DUBLIN 24

M. Mulhern
DIRECTOR

T. O'Grady
SENIOR ENGINEER

REV.	DATE	DESCRIPTION

SCALE	1:500 @ A3
DATE	Nov 2021
DRAWN	AG
CHECKED	AB

PROJECT TITLE	CASTLETYMON ENHANCEMENT PROJECT
DRAWING TITLE	Landscape Plan
DRAWING NO.	SDCC-CEP-0011
REV.	P8-01